SBC682PNRCMTWIN



33.63" x 23.75" x 24.75" (H x W x D)

24" wide indoor/outdoor dual tap combination cold brew/nitro coffee dispenser for built-in or freestanding commercial or residential use, with panel-ready door, stainless steel exterior, and caster set

Highlights:

Customizable door accepts full overlay panels for a seamless look that can blend into cabinetry

Commercially approved to NSF-7 standards

Unique tap combination allows you to serve both nitro and regular cold brew on tap from two separate sixtel kegs

Product Features:

Full-sized coffee dispenser	5.6 cu.ft. interior can accept a full half barrel or quarter keg, or up to three sixth barrels or Cornelius style kegs
Dispenses both flat and nitro coffee	Unique combination stout and standard tap system allows you to serve both flat iced cold brew and nitro drafts
Panel-ready door	Extended hinging allows you to install your own panel overlay on the door, creating a custom look to complement or blend into your own cabinetry (panel size: 29 3/4" H x 23 5/16" W at a 3/4" thickness)
Commercially approved	ETL-S listed to NSF-7 standards and meets UL-471 for use in commercial settings
Weatherproof design	Solid 304 grade stainless steel construction allows placement in the outdoors
Built-in capable	Front-breathing design allows fully recessed installation under counters
Complete dual tap kit	Commercial grade tap kit includes a dual tap draft tower with a standard and stout tap, Nitrogen tank, dual gauge regulator, and connections for ball lock Cornelius kegs
Dual tap system	Twin draft tower allows you to serve from two 1/6 (sixtel) sized kegs
Automatic defrost	Reduced user maintenance with auto defrost operation


SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799 info@summitappliance.com **www.summitappliance.com**


SUMMIT

SBC682PNRCMTWIN Specifications:

Overview	
Nominal Height	34.0" (86 cm)
Height of Cabinet	33.63" (85 cm)
Nominal Width	24.0" (61 cm)
Width	23.75" (60 cm)
Nominal Depth	25.0" (64 cm)
Depth	24.75" (63 cm)
Depth with door at 90°	46.75" (119 cm)
Capacity	5.6 cu.ft. (159 L)
Defrost Type	Automatic
Door	Panel-Ready
Cabinet	Stainless Steel
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Energy Usage/Year	305.0kWh/year
Amps	1.25
Voltage/Frequency	115 V AC/60 Hz
Weight	120.0 lbs. (54 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101087474
Kegerator	
Door Swing	RHD
Reversible	Reversible w/ Optional Hinge
Tap Kit	Yes
Height with Tap	51.5" (131 cm)
Number of Taps	2
Adjustable Shelves	Yes
Shelf Type	Chrome
Shelf Qty	2
Thermostat Type	Digital
Fan Type	Interior and Exterior
Refrigerant	R600a
Refrigerant Amount	1.06 oz.
High Side PSI	150.0

Low Side PSI	50.0
Inter Height	26.75" (68 cm)
Interior Width	20.0" (51 cm)
Interior Depth	19.0" (48 cm)
Level Legs Qty	4
Wheel Qty	4
Temperature Range	34°F to 68°F (1°C to 20°C)
Sound Level	34.0 db

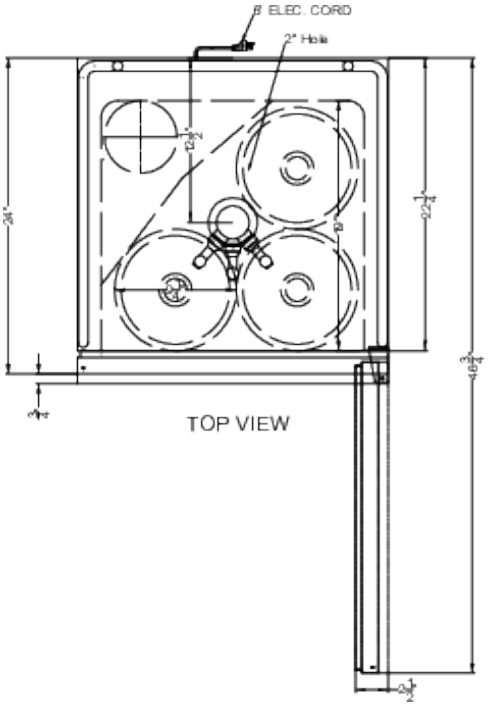

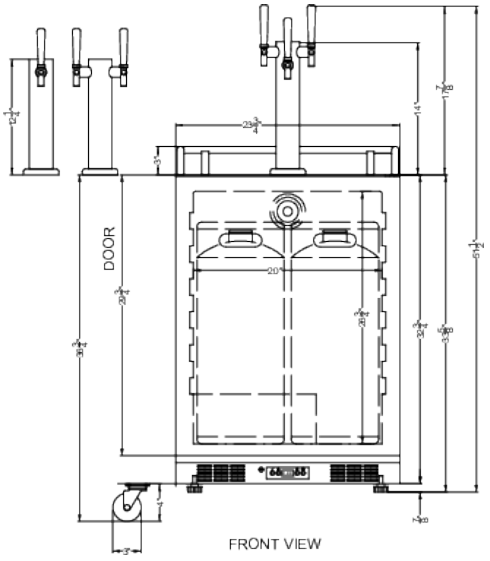

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799 info@summitappliance.com **www.summitappliance.com**